

正基科技股份有限公司

SPECIFICATION

PRODUCT NAME : AP6203BM

REVISION : V1.3

DATE : Mar. 08th, 2023

Customer APPROVED	
Company	
Representative Signature	

PREPARED	REVIEW			APPROVED	DCC ISSUE
	PM	QA	ET		



正基科技股份有限公司



AP6203BM Data Sheet

Address:

3F, No.15-1 Zhonghua Road, Hsinchu Industrial Park, Hukou,
Hsinchu, Taiwan, 30352
<http://www.ampak.com.tw>



Revision

Revision	Date	Description	Revised By
V0.1	2019/10/31	- Preliminary	Milk
V0.2	2019/11/15	- Revise spec	Milk
V0.3	2019/12/25	- Revise spec	Milk
V0.4	2020/01/03	- Revise Pin Assignment	Richard
V0.5	2020/02/11	- Revise spec	Milk
V0.6	2020/05/07	- Revise Xtal information & SPI interface	Milk
V0.7	2020/06/15	- Modify Bluetooth specifications	Milk
V1.0	2021/02/23	-Revise Description	Milk
V1.1	2021/12/21	-Modify Bluetooth specifications	Richard
V1.2	2022/01/07	-Modify Block Diagram	Richard
V1.3	2023/03/08	-Modify VBAT supply range	Richard

Contents

1. Introduction	2
1.1 Overview	2
1.2 Product Features	3
2. General Specification	4
2.1 General Specification	4
2.2 DC Characteristics	4
2.2.1 Absolute Maximum Ratings	4
2.2.2 Recommended Operating Rating	4
3. Wi-Fi RF Specification	5
3.1 2.4GHz RF Specification	5
3.2 5GHz RF Specification	7
4. Bluetooth Specification	9
4.1 Bluetooth Specification	9
5. Pin Definition	10
5.1 Pin Outline	10
5.2 Pin Assignment	11
6. Dimensions	13
6.1 Module Dimensions	13
6.2 Recommended footprint	14
7. External clock reference	15
8. Host Interface Timing Diagram	16
8.1 Power-up Sequence Timing Diagram	16
8.2 SDIO Interface Description	18
8.3 SPI interface	24
8.4 PCM Timing	25
8.5 UART Timing	30
9. Recommended Reflow Profile	32
10. Package Information	33
10.1 Label	33
10.2 Dimension	34
10.3 MSL Level / Storage Condition	36


1. Introduction

1.1 Overview

AMPAK Technology would like to announce a low-cost and low-power consumption module which has all of the Wi-Fi, Bluetooth functionalities. The highly integrated module makes the possibilities of web browsing, VoIP, Bluetooth headsets applications. With seamless roaming capabilities and advanced security, also could interact with different vendors' 802.11 a/b/g/n Access Points in the wireless LAN.

The wireless module complies with IEEE 802.11 a/b/g/n standard and it can achieve up to a speed of 72Mbps with single stream in 802.11n to connect to the wireless LAN. The integrated module provides SDIO interface for Wi-Fi, UART / PCM interface for Bluetooth.

This compact module is a total solution for a combination of Wi-Fi + Bluetooth technologies. The module is specifically developed for Smart phones and Portable devices.

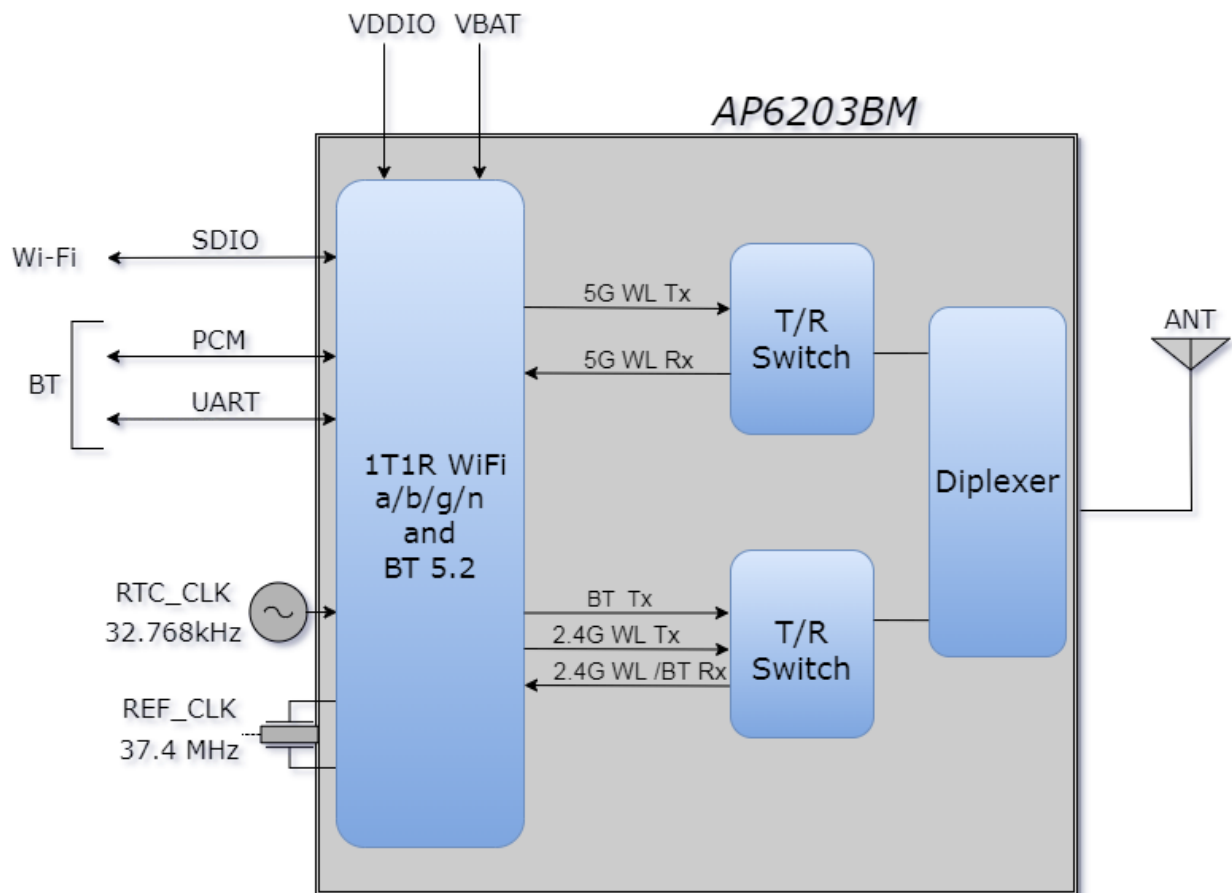

1.2 Product Features

- IEEE 802.11a/b/g/n dual-band radio with virtual-simultaneous single-band operation
- Single spatial stream up to a 72 Mbps data rate
- Supports Bluetooth V5.2 with integrated PA for Class 1.5 and Low Energy (BLE).
- Concurrent Bluetooth, and Wi-Fi operation
- Simultaneous Bluetooth/Wi-Fi receive with single antenna
- Supports standard SDIO v2.0 and SDIO v3.0(SDR50 at 80 MHz and DDR50 at 40 MHz).
- Bluetooth host digital interface: UART (up to 4 Mbps)
- IEEE Co-existence technologies are integrated die solution
- ECI — enhanced coexistence support, ability to coordinate Bluetooth SCO transmissions around Wi-Fi receives

2. General Specification

2.1 General Specification

Model Name	AP6203BM
Product Description	1T1R 802.11 a/ b/g/n Wi-Fi + Bluetooth 5.2 Module
Dimension	L x W : 12 x 12(typical) mm H: 1.7(Max) mm
Wi-Fi Interface	SDIO V3.0/2.0 & SPI
Bluetooth Interface	UART / PCM
Operating temperature	-30°C to 85°C
Storage temperature	-40°C to 125°C
Humidity	Operating Humidity 10% to 95% Non-Condensing

Note: The Optimal RF performance specified in the data sheet, however, is guaranteed only for -20~75°C.

It is functional across this range of voltages. Optimal RF performance specified in the data sheet, however, is guaranteed only for $3.2V < V_{BAT} < 4.8V$.

2.2 DC Characteristics

2.2.1 Absolute Maximum Ratings

Symbol	Description	Min.	Max.	Unit
V _{BAT}	Input supply Voltage	-0.5	5.0	V
V _{DDIO}	Digital/Bluetooth/SDIO/ I/O Voltage	-0.5	2.0	V

2.2.2 Recommended Operating Rating

The module requires two power supplies: V_{BAT} and V_{DDIO}

Voltage rails	Min.	Typ.	Max.	Unit
V _{BAT}	3.0	3.3	4.8	V

VDDIO	1.62	1.8	1.98	V
-------	------	-----	------	---

3. Wi-Fi RF Specification

3.1 2.4GHz RF Specification

Conditions : VBAT=3.3V ; VDDIO=1.8V ; Temp:25°C

Feature		Description			
Wi-Fi Standard		IEEE 802.11b/g/n & Wi-Fi compliant			
Frequency Range		2.400 GHz ~ 2.4835 GHz (2.4GHz ISM Band)			
Number of Channels		2.4GHz：Ch1 ~ Ch13			
Modulation		802.11b：CCK 802.11 g/n：OFDM /64-QAM、16-QAM、QPSK、BPSK			
Output Power , tolerance ± 1.5 dB					
The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard					
802.11b	1Mbps	2Mbps	5.5Mbps	11Mbps	
	19	19	19	19	
802.11g	6、9Mbps	12、18Mbps	24Mbps	36Mbps	48Mbps
	19	19	18.5	18.5	18
	54Mbps				
	17				
802.11n 20MHz	MCS0~2	MCS3	MCS4	MCS5	MCS6
	19	19	18.5	18	17
	MCS7				
	16				
Note：The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.					
Sensitivity, tolerance ± 2 dB					
CCK modulation PER ≤ 8%、OFDM modulation PER ≤ 10%					
802.11b	Data Rate	Spec.(dBm)			
	1Mbps	-95			
	2Mbps	-92			
	5.5Mbps	-90			
	11Mbps	-87			
802.11g	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)	
	6Mbps	-91	24Mbps	-82	

	9Mbps	-88	36Mbps	-79
	12Mbps	-87	48Mbps	-76
	18Mbps	-85	54Mbps	-75
802.11n_20MHz	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-91	MCS4	-79
	MCS1	-88	MCS5	-75
	MCS2	-85	MCS6	-74
	MCS3	-82	MCS7	-73
Maximum Input Level	802.11b : -10 dBm			
	802.11g/n : -20 dBm			

3.2 5GHz RF Specification

Conditions : VBAT=3.3V ; VDDIO=1.8V ; Temp:25°C

Feature		Description			
Wi-Fi Standard		IEEE 802.11a/n/ & Wi-Fi compliant			
Frequency Range		5.15~5.35GHz 、 5.47~5.725GHz 、 5.725~5.85GHz (5GHz UNII Band)			
Number of Channels		5.18~5.35GHz : Ch36 ~ Ch64 5.5~5.7GHz : Ch100 ~ Ch140 5.745~5.825GHz : Ch149 ~ Ch165			
Modulation		802.11a : OFDM /64-QAM 、 16-QAM 、 QPSK 、 BPSK 802.11n : OFDM /64-QAM 、 16-QAM 、 QPSK 、 BPSK			
Output Power , tolerance ± 2 dB					
The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard					
802.11a	Frequency (MHz)	6~9Mbps	12~18Mbps	24Mbps	36Mbps
	5180~5350	14	14	14	13.5
	5500~5700	14	14	14	13.5
	5745~5825	14	14	14	13.5
	Frequency (MHz)	48Mbps	54Mbps		
	5180~5350	13.5	13.5		
	5500~5700	13.5	13.5		
	5745~5825	13.5	13.5		
802.11n 20MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5180~5350	14	14	14	13.5
	5500~5700	14	14	14	13.5
	5745~5825	14	14	14	13.5
	Frequency (MHz)	MCS6	MCS7		
	5180~5350	13.5	13		
	5500~5700	13.5	13		
	5745~5825	13.5	13		
Note : The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.					
Sensitivity, tolerance ± 2 dB					
OFDM modulation PER ≤ 10%					
802.11a	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)	
	6Mbps	-91	24Mbps	-81	
	9Mbps	-88	36Mbps	-78	

	12Mbps	-87	48Mbps	-74
	18Mbps	-85	54Mbps	-73
802.11n_20MHz	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-91	MCS4	-76
	MCS1	-87	MCS5	-74
	MCS2	-84	MCS6	-73
	MCS3	-81	MCS7	-72
Maximum Input Level	802.11a/n : -20 dBm			

4. Bluetooth Specification

4.1 Bluetooth Specification

Conditions : VBAT=3.3V ; VDDIO=1.8V ; Temp:25°C

Feature	Description		
General Specification			
Bluetooth Standard	BDR、EDR(2、3Mbps)、LE(1、2Mbps)		
Host Interface	UART		
Frequency Band	2402 MHz ~ 2480 MHz		
Number of Channels	79 channels for classic、40 channels for BLE		
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RF Specification			
	Min.	Typical.	Max.
BDR Output Power	6	7	12
EDR Output Power	6	7	12
BLE Output Power	7	8	9
Sensitivity @ BER=0.1% for GFSK (1Mbps)		-90 dBm	
Sensitivity @ BER=0.01% for $\pi/4$ -DQPSK (2Mbps)		-93 dBm	
Sensitivity @ BER=0.01% for 8DPSK (3Mbps)		-86 dBm	
Sensitivity @ PER=30.8% for LE (1Mbps)		-93dBm	
Sensitivity @ PER=30.8% for LE (2Mbps)		-90 dBm	
Maximum Input Level	GFSK (1Mbps):-20dBm		
	$\pi/4$ -DQPSK (2Mbps) :-20dBm		
	8DPSK (3Mbps) :-20dBm		


Note* : The Bluetooth output power is able to be configured by firmware (hcd file).



5. Pin Definition

5.1 Pin Outline

< TOP VIEW >

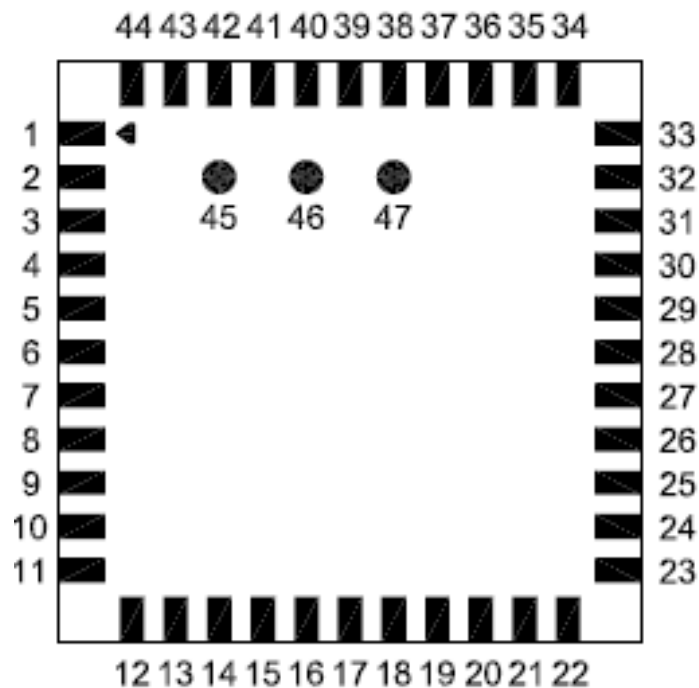

5.2 Pin Assignment


NO	Name	Type	Description
1	GND	—	Ground connections
2	WL_BT_ANT	I/O	RF I/O port
3	GND	—	Ground connections
4	NC	—	Floating (Don't connected to ground)
5	GND	—	Ground connections
6	HOST_WAKE_BT	I	HOST wake-up Bluetooth device, connect to SoC
7	BT_WAKE_HOST	O	Bluetooth device to wake-up HOST, connect to SoC
8	CLK_REQ	—	Reference clock request
9	VBAT	P	Main power voltage source input
10	XTAL_ON	I	Crystal Input
11	XTAL_OP	O	Crystal output
12	WL_REG_ON	I	Power up/down internal regulators used by Wi-Fi section
13	WL_HW_OOB	O	OOB, connect to SoC
14	SDIO_DATA_2	I/O	SDIO data line 2
15	SDIO_DATA_3/CS	I/O	SDIO data line 3/ SPI card select
16	SDIO_DATA_CMD/MOSI	I/O	SDIO command line/SPI Master Output ,Slave Input
17	SDIO_DATA_CLK/SCLK	I/O	SDIO clock line/ SPI Serial Clock
18	SDIO_DATA_0/MISO	I/O	SDIO data line 0/ SPI Master Input ,Slave Output
19	SDIO_DATA_1	I/O	SDIO data line 1
20	GND	—	Ground connections
21	VIN_LDO_OUT	P	Internal Buck voltage generation pin
22	VDDIO	P	I/O Voltage supply input
23	VIN_LDO	P	Internal Buck voltage generation pin
24	LPO	I	External Low Power Clock input (32.768KHz)
25	PCM_OUT	O	PCM Data output
26	PCM_CLK	I/O	PCM clock
27	PCM_IN	I	PCM data input
28	PCM_SYNC	I/O	PCM sync signal
29	BT_GPIO_3/dbg_uart_tx	O	Bluetooth uart tx mapping
30	BT_GPIO_5	I/O	Bluetooth GPIO configuration pin
31	GND	—	Ground connections
32	BT_GPIO_2	O	Bluetooth wakeup, connect to MCU



33	GND	—	Ground connections
34	BT_REG_ON	I	Power up/down internal regulators used by Bluetooth section
35	WL_GPIO_2	I/O	Wi-Fi GPIO configuration pin
36	GND	—	Ground connections
37	WL_GPIO_1/wowl_wakeup	O	wowl wakeup, connect to MCU
38	WL_GPIO_3	I/O	Wi-Fi GPIO configuration pin
39	WL_GPIO_4/uart_rx	I	Normal gpio/ Wi-Fi uart rx, connect to MCU
40	WL_GPIO_5	I/O	Wi-Fi GPIO configuration pin
41	UART_RTS_N	O	Bluetooth UART interface
42	UART_TXD	O	Bluetooth UART interface
43	UART_RXD	I	Bluetooth UART interface
44	UART_CTS_N	I	Bluetooth UART interface
45	WL_GPIO_6/uart_tx	O	DBG uart tx, Wi-Fi uart tx, connect to MCU
46	EX_LDO	P	Floating (Reserved voltage generation pin)
47	BT_GPIO_4	I/O	Bluetooth GPIO configuration pin

6. Dimensions


6.1 Module Dimensions

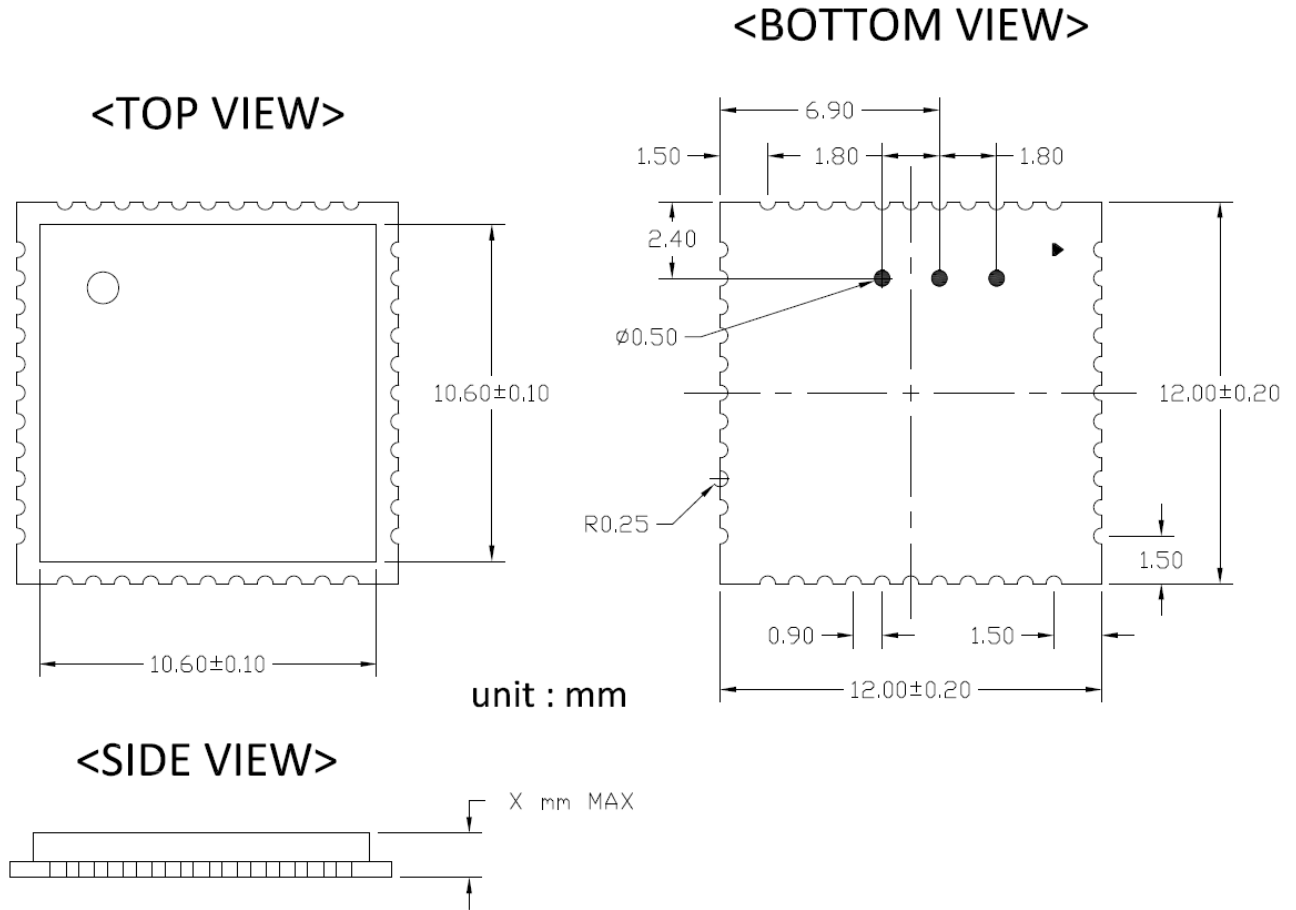


Noted: X=1.7



6.2 Recommended footprint

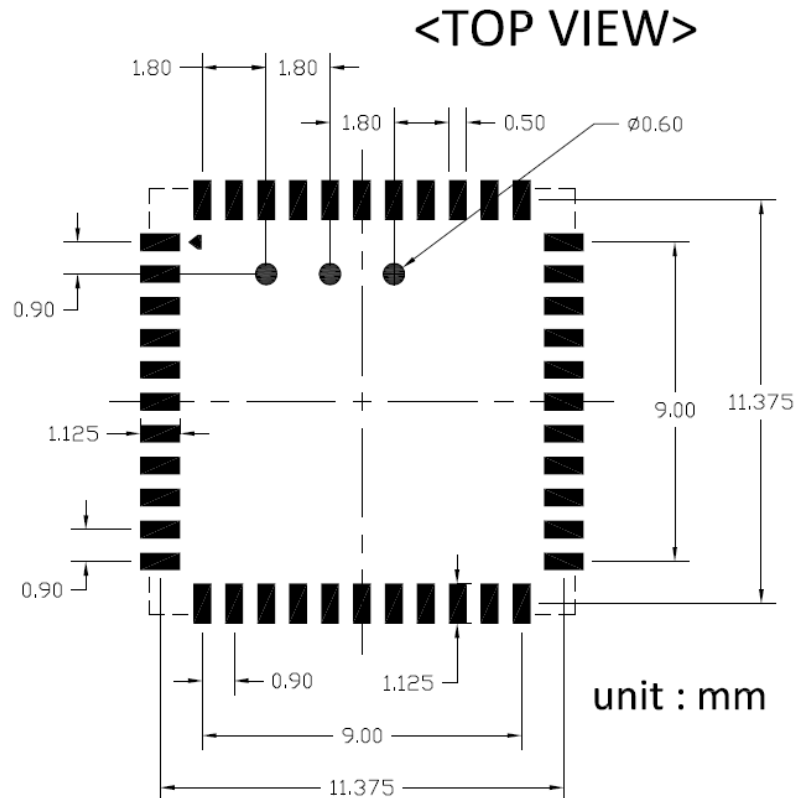

- Solder paste layer design is generally the same as recommended footprint.
(錫膏層設計通常建議和焊墊尺寸相同)
- If soldering quality with good wetting on upright side is essential for PQC, how to optimize the aperture design in the stencil to adjust the amount of solder paste would be crucial.
In addition, a kind of stencil design with stepped thickness in partial area would be considered if the thickness of stencil is about 0.1mm or thinner. Please optimize the stencil design by manufacture engineer or contact AMPAK FAE for assistance.
(如果模組吃錫品質考量側面爬錫，如何優化鋼網開孔設計以調整適當的錫膏量是非常重要的。尤其鋼網的厚度大約是 0.1mm 或更薄時，可考慮局部加厚鋼網的設計。請諮詢製程工程師以優化鋼網的設計,或是聯絡正基科技技術支持團隊).

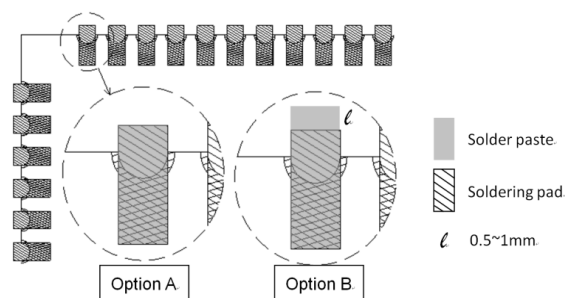

7. External clock reference

External LPO signal characteristics

Parameter	Specification	Units
Nominal input frequency	32.768	kHz
Frequency accuracy	+/-200	ppm
Duty cycle	30 – 70	%
Input signal amplitude	500 to 1800	mV, p-p
Signal type	Square-wave or sine-wave	-
Input impedance	>100k	Ω
	<5	pF
Clock jitter (integrated over 300Hz – 15KHz)	<1	Hz
Output high voltage	0.7V _{io} - V _{io}	V

Input signal amplitude follow VDDIO (1.8V)

External 37.4MHz X'TAL characteristics

Parameter	Specification	Units
Nominal frequency - F ₀	37.4	MHz
Frequency Tolerance - $\Delta F / F_0$ (At 25°C +/- 3°C)	+/- 10	ppm
Operation Temperature Range - Topr	-30 ~ + 85	°C
Freq. Stability(over operating temperature) - TC Ref. to 25°C	+/- 10	ppm
Load capacitance - CL	16	pF
Equivalent Series Resistance – ESR	Max. 60	Ω
Drive Level - DL	Typ. 50, Max. 100	uW
Insulation resistance – IR At 100Vdc	Min. 500	M Ω




8. Host Interface Timing Diagram

8.1 Power-up Sequence Timing Diagram


The module has signals that allow the host to control power consumption by enabling or disabling the Bluetooth, Wi-Fi and internal regulator blocks. These signals are described below.

Additionally, diagrams are provided to indicate proper sequencing of the signals for various operating states. The timing value indicated are minimum required values: longer delays are also acceptable.


- **WL_REG_ON**: Used by the PMU to power up or power down the internal regulators used by the Wi-Fi section. When this pin is high, the regulators are enabled and the Wi-Fi section is out of reset. When this pin is low the Wi-Fi section is in reset.
- **BT_REG_ON**: Used by the PMU to power up or power down the internal regulators used by the Bluetooth section. Low asserting reset for Bluetooth. This pin has no effect on Wi-Fi and does not control any PMU functions. This pin must be driven high or low (not left floating).

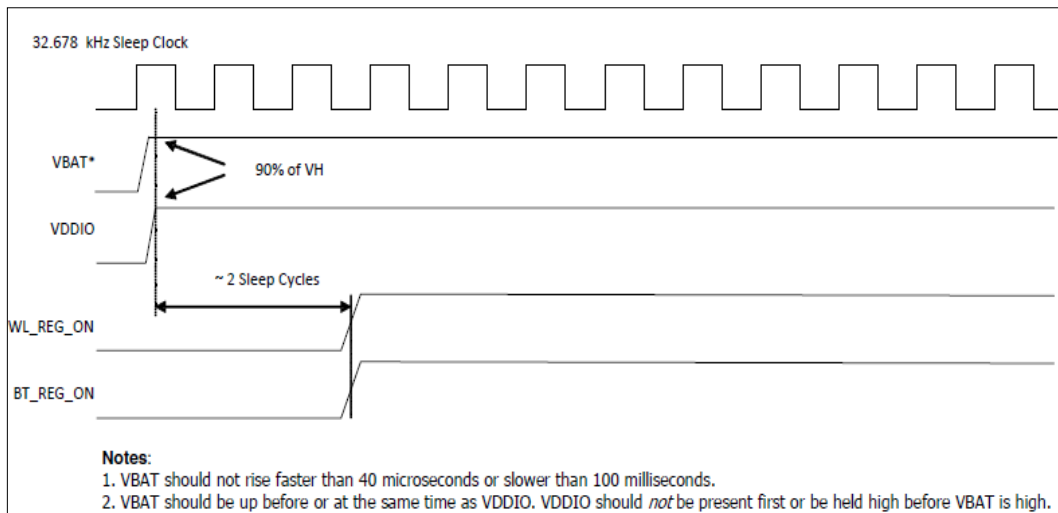


Wi-Fi=ON, Bluetooth=ON

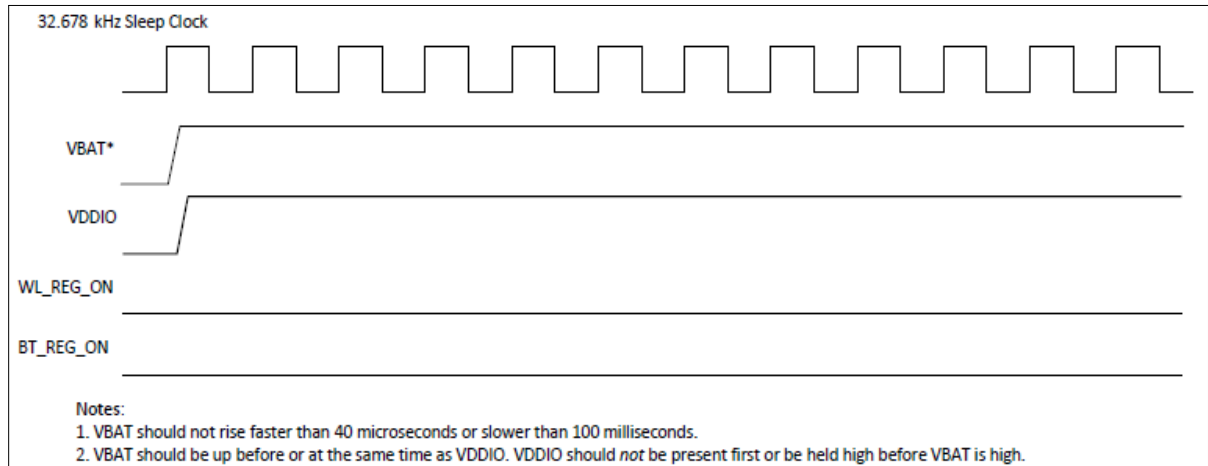

Wi-Fi=OFF, Bluetooth=OFF

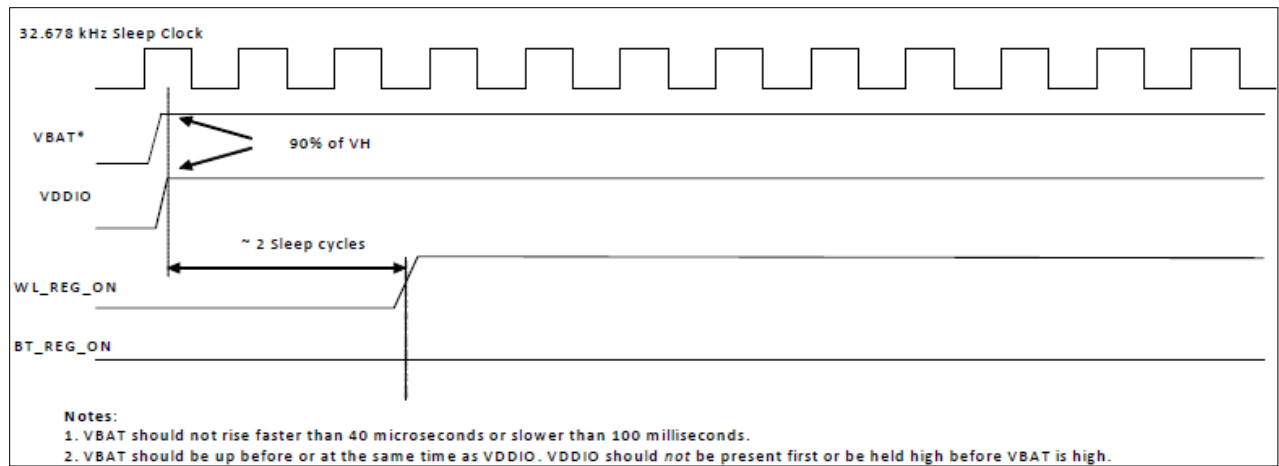

Wi-Fi=ON, Bluetooth=OFF

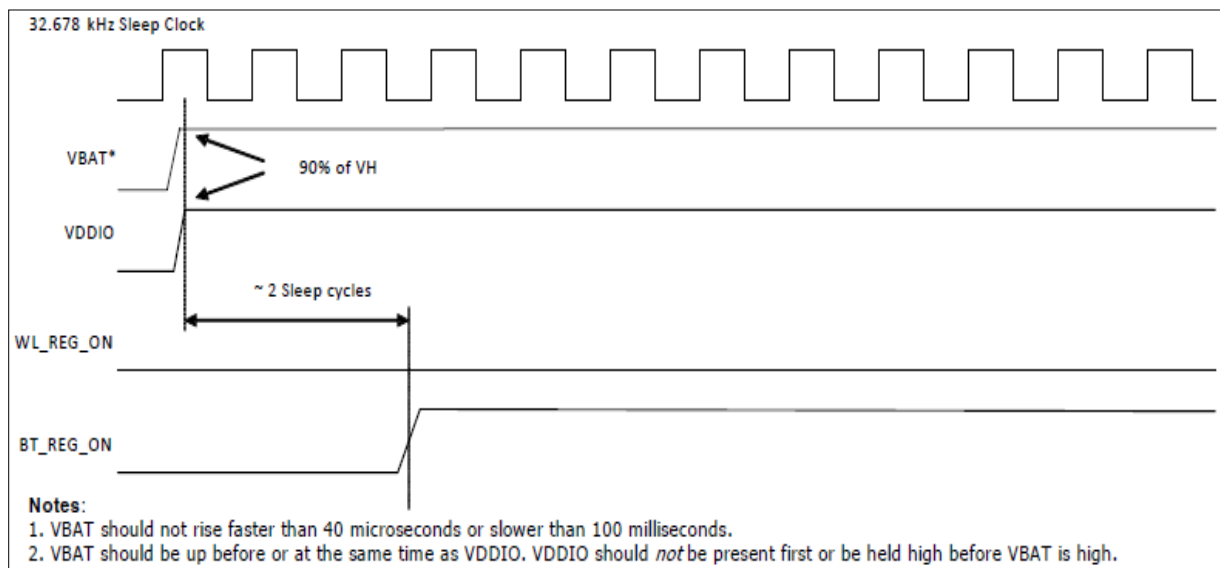

Wi-Fi=OFF, Bluetooth=ON



8.2 SDIO Interface Description

The Wi-Fi section supports SDIO version 3.0, including the new UHS-I modes:

- DS: Default speed up to 25MHz (1.8V signaling), including 1- and 4-bit modes.
- HS: High speed up to 50MH (1.8V signaling).
- SDR12: SDR up to 25MHz (1.8V signaling).
- SDR25: SDR up to 50MHz (1.8V signaling).
- SDR50: SDR up to 80MHz (1.8V signaling).
- DDR50: DDR up to 40MHz (1.8V signaling).

The SDIO interface also has the ability to map the interrupt signal onto a GPIO pin for applications requiring a different interrupt than the one provided by the SDIO interface. The ability to force control of the gated clocks from within the device is also provided.

The following three functions are supported:


- Function 0 Standard SDIO function (max. BlockSize/ByteCount = 32B)
- Function 1 Backplane Function to access the internal system-on-chip (SoC) address space (max. BlockSize/ByteCount = 512B)
- Function 2 Wi-Fi Function for efficient Wi-Fi packet transfer through DMA (max. BlockSize/ByteCount = 512B).
- • Function 3 based on the SDIO Type-A Specification for Bluetooth (max. BlockSize/ByteCount = 256/256B)

SDIO Pin Description

SD 4-Bit Mode	
DATA0	Data Line 0
DATA1	Data Line 1 or Interrupt
DATA2	Data Line 2 or Read Wait
DATA3	Data Line 3
CLK	Clock
CMD	Command Line




SDIO Default Mode Timing Diagram

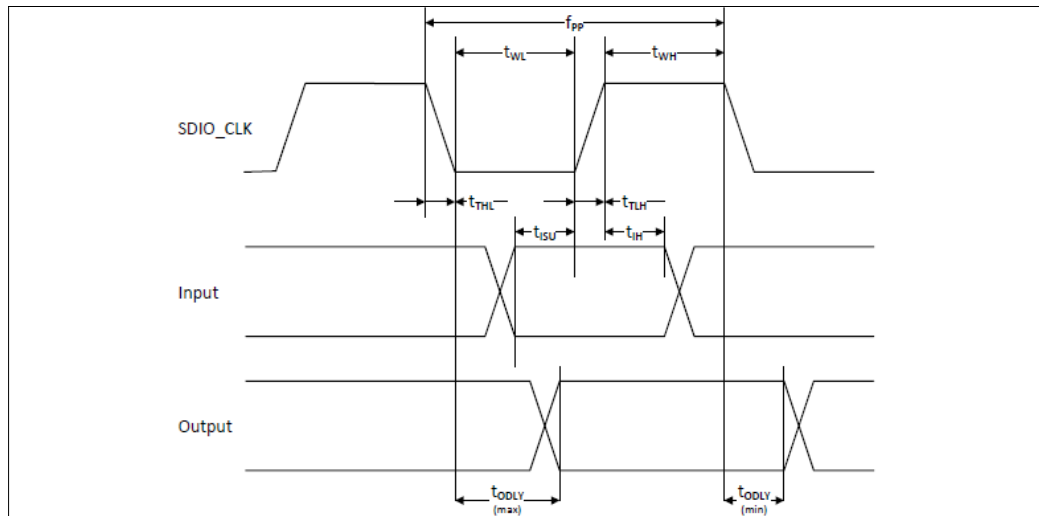

Parameter	Symbol	Minimum	Typical	Maximum	Unit
SDIO CLK (All values are referred to minimum V_{IH} and maximum V_{IL}^b)					
Frequency – Data Transfer mode	f_{PP}	0	–	25	MHz
Frequency – Identification mode	f_{OD}	0	–	400	kHz
Clock low time	t_{WL}	10	–	–	ns
Clock high time	t_{WH}	10	–	–	ns
Clock rise time	t_{TLH}	–	–	10	ns
Clock fall time	t_{THL}	–	–	10	ns
Inputs: CMD, DAT (referenced to CLK)					
Input setup time	t_{ISU}	5	–	–	ns
Input hold time	t_{IH}	5	–	–	ns
Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer mode	t_{ODLY}	0	–	14	ns
Output delay time – Identification mode	t_{ODLY}	0	–	50	ns

- a. Timing is based on $CL \leq 40pF$ load on CMD and Data.
b. $\min(V_{IH}) = 0.7 \times V_{DDIO}$ and $\max(V_{IL}) = 0.2 \times V_{DDIO}$.

SDIO High Speed Mode Timing Diagram

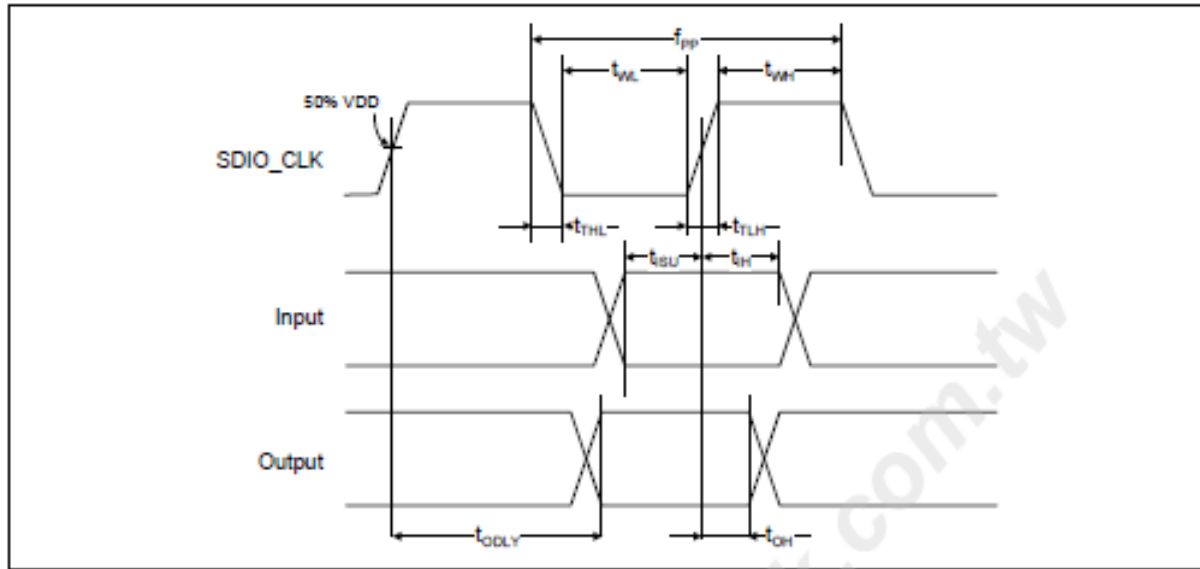


Parameter	Symbol	Minimum	Typical	Maximum	Unit
SDIO CLK (all values are referred to minimum V_{IH} and maximum V_{IL}^b)					
Frequency – Data Transfer Mode	f_{PP}	0	–	50	MHz
Frequency – Identification Mode	f_{OD}	0	–	400	kHz
Clock low time	t_{WL}	7	–	–	ns
Clock high time	t_{WH}	7	–	–	ns
Clock rise time	t_{TLH}	–	–	3	ns
Clock low time	t_{THL}	–	–	3	ns
Inputs: CMD, DAT (referenced to CLK)					
Input setup Time	t_{ISU}	6	–	–	ns
Input hold Time	t_{IH}	2	–	–	ns
Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer Mode	t_{ODLY}	–	–	14	ns
Output hold time	t_{OH}	2.5	–	–	ns
Total system capacitance (each line)	CL	–	–	40	pF

- a. Timing is based on $CL \leq 40$ pF load on CMD and Data.
b. $\min(V_{IH}) = 0.7 \times V_{DDIO}$ and $\max(V_{IL}) = 0.2 \times V_{DDIO}$.

SDIO Bus Timing Specifications in SDR Modes


Clock timing(SDR Modes)

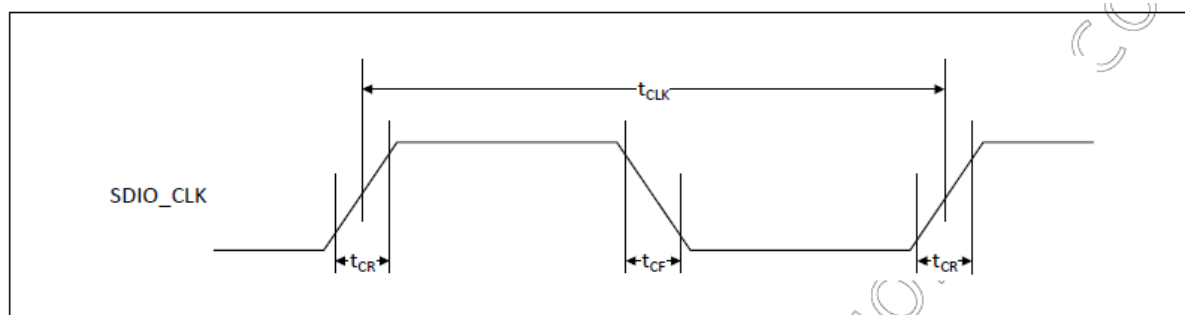

Parameter	Symbol	Minimum	Maximum	Unit	Comments
–	t_{CLK}	40	–	ns	SDR12 mode
		20	–	ns	SDR25 mode
		12.5	–	ns	SDR50 mode
–	t_{CR}, t_{CF}	–	$0.2 \times t_{CLK}$	ns	$t_{CR}, t_{CF} < 2.00$ ns (max) @ 100 MHz, $C_{CARD} = 10$ pF $t_{CR}, t_{CF} < 0.96$ ns (max) @ 208 MHz, $C_{CARD} = 10$ pF
Clock duty cycle	–	30	70	%	–

Card Input timing (SDR Modes)


SDIO Bus Input Timing (SDR Modes)

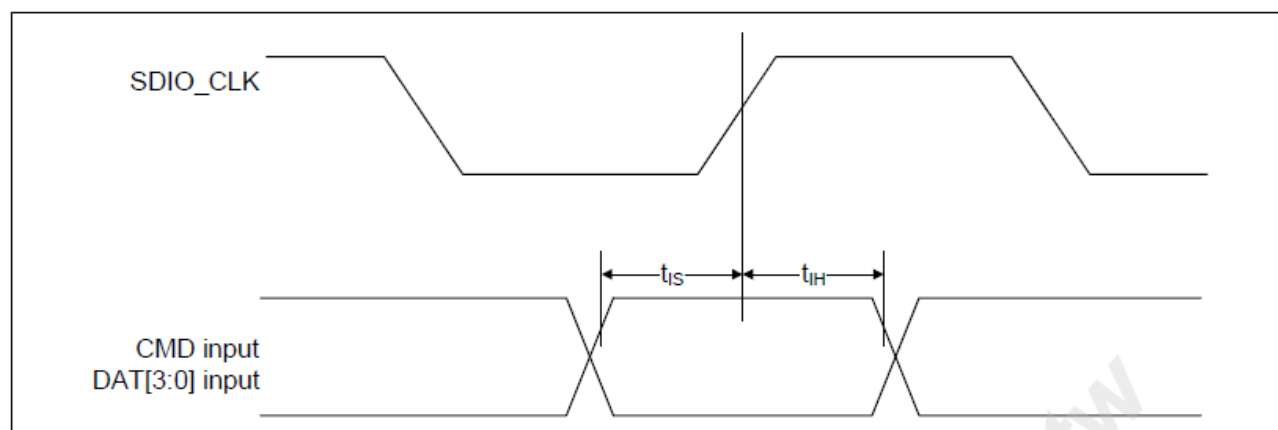

SDIO Bus Input Timing Parameters (SDR Modes)


Symbol	Minimum	Maximum	Unit	Comments
SDR50 Mode				
t_{IS}	3.00	–	ns	$C_{CARD} = 10$ pF, VCT = 0.975V
t_{IH}	0.8	–	ns	$C_{CARD} = 5$ pF, VCT = 0.975V

Card output timing (SDR Modes up to 80MHz)

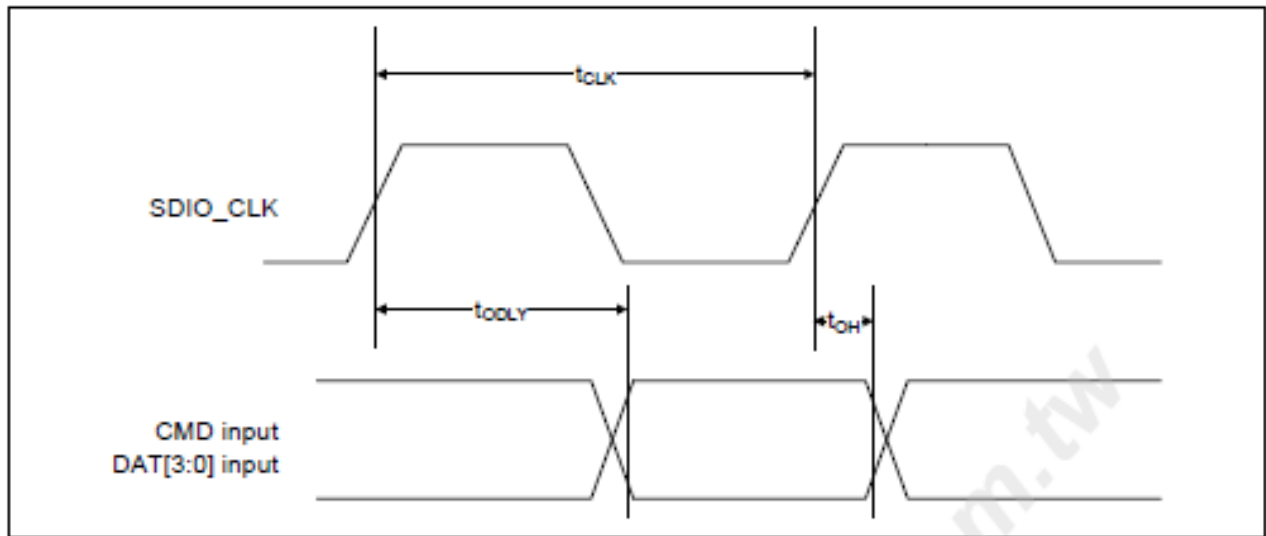


Symbol	Minimum	Maximum	Unit	Comments
t_{ODLY}	–	7.5	ns	$t_{CLK} \geq 10$ ns $C_L = 30$ pF using driver type B for SDR50
t_{ODLY}	–	14.0	ns	$t_{CLK} \geq 20$ ns $C_L = 40$ pF using for SDR12, SDR25
t_{OH}	1.5	–	ns	Hold time at the t_{ODLY} (min) $C_L = 15$ pF

SDIO Bus Timing Specifications in DDR50 Mode

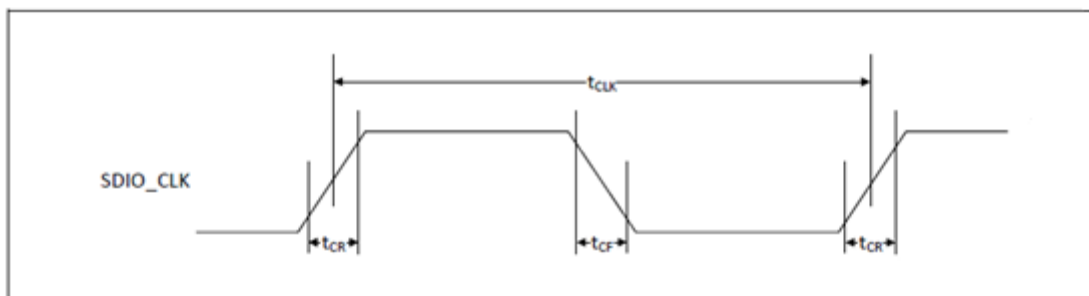

Parameter	Symbol	Minimum	Maximum	Unit	Comments
–	t_{CLK}	25	–	ns	DDR50 mode
–	t_{CR}, t_{CF}	–	$0.2 \times t_{CLK}$	ns	$t_{CR}, t_{CF} < 4.00$ ns (max) @50 MHz, $C_{CARD} = 10$ pF
Clock duty cycle	–	45	55	%	–


Data Timing

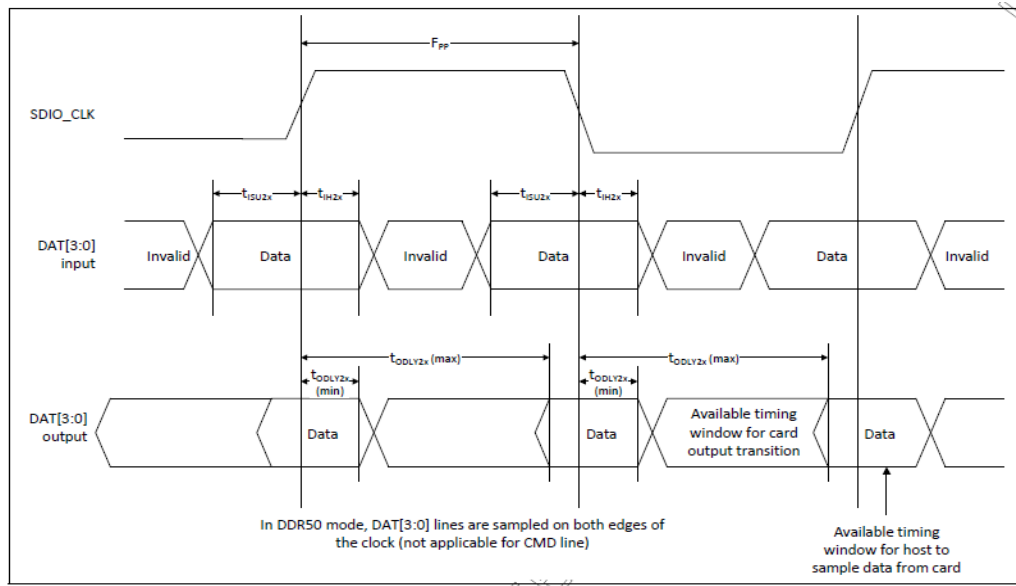

Parameter	Symbol	Minimum	Maximum	Unit	Comments
Input CMD					
Input setup time	t_{ISU}	6	—	ns	$C_{CARD} < 10 \text{ pF}$ (1 Card)
Input hold time	t_{IH}	0.8	—	ns	$C_{CARD} < 10 \text{ pF}$ (1 Card)
Output CMD					
Output delay time	t_{ODLY}	—	13.7	ns	$C_{CARD} < 30 \text{ pF}$ (1 Card)
Output hold time	t_{OH}	1.5	—	ns	$C_{CARD} < 15 \text{ pF}$ (1 Card)
Input DAT					
Input setup time	t_{ISU2x}	3	—	ns	$C_{CARD} < 10 \text{ pF}$ (1 Card)
Input hold time	t_{IH2x}	0.8	—	ns	$C_{CARD} < 10 \text{ pF}$ (1 Card)
Output DAT					
Output delay time	t_{ODLY2x}	—	7.5	ns	$C_{CARD} < 25 \text{ pF}$ (1 Card)
Output hold time	t_{ODLY2x}	1.5	—	ns	$C_{CARD} < 15 \text{ pF}$ (1 Card)


8.3 SPI interface

- Up to 50 MHz operation
- Fixed delays for responses and data from the device
- Alignment to host gSPI frames (16 or 32 bits)
- Up to 2 KB frame size per transfer
- Little-endian and big-endian configurations
- A configurable active edge for shifting
- Packet transfer through DMA for Wi-Fi

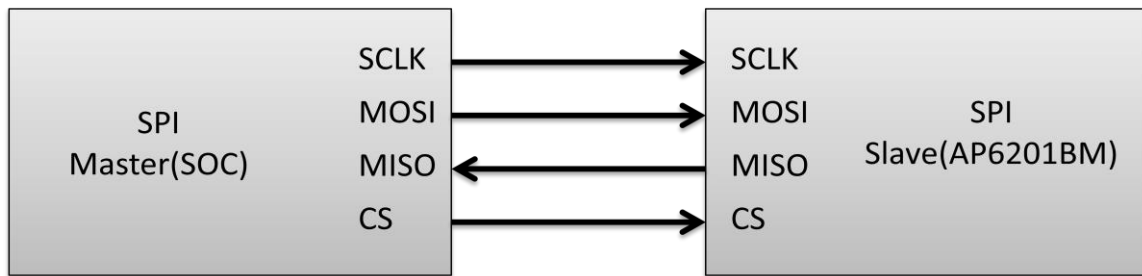

gSPI Mode Timing Diagram

gSPI Timing

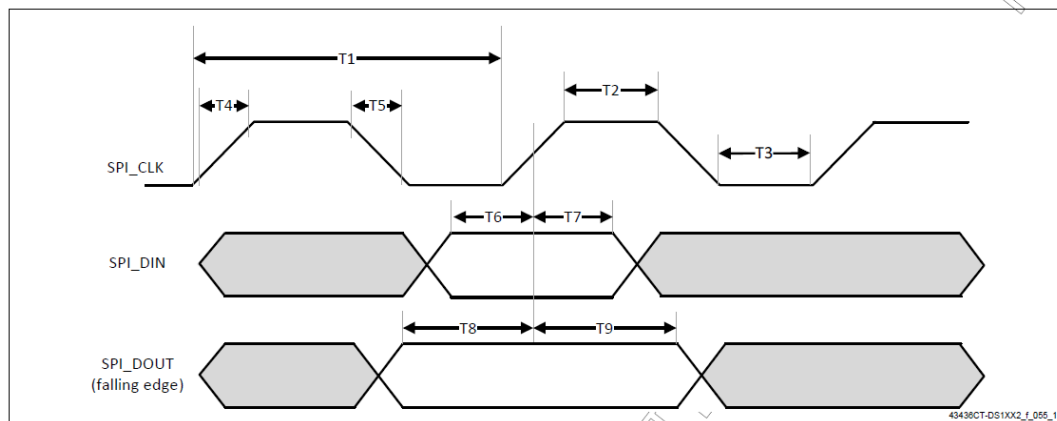

gSPI Timing Parameters

Parameter	Symbol	Minimum	Maximum	Units	Note
Clock period	T1	20.8	—	ns	$F_{\max} = 50 \text{ MHz}$
Clock high/low	T2/T3	$(0.45 \times T1) - T4$	$(0.55 \times T1) - T4$	ns	—
Clock rise/fall time	T4/T5	—	2.5	ns	—
Input setup time	T6	5.0	—	ns	Setup time, SIMO valid to SPI_CLK active edge
Input hold time	T7	5.0	—	ns	Hold time, SPI_CLK active edge to SIMO invalid
Output setup time	T8	5.0	—	ns	Setup time, SOMI valid before SPI_CLK rising
Output hold time	T9	5.0	—	ns	Hold time, SPI_CLK active edge to SOMI invalid
CSX to clock ^a	—	7.86	—	ns	CSX fall to 1st rising edge
Clock to CSX	—	—	—	ns	Last falling edge to CSX high


a. SPI_CSx remains active for entire duration of gSPI read/write/write_read transaction (that is, overall words for multiple word transaction).

8.4 PCM Timing

The PCM Interface on the AP6203BM can connect to linear PCM Codec devices in master or slave mode. In master mode, the AP6203BM generates the PCM_CLK and PCM_SYNC signals, and in slave mode, these signals are provided by another master on the PCM interface and are inputs to the AP6203BM. The configuration of the PCM interface may be adjusted by the host through the use of vendor-specific HCI commands.

Short Frame Sync, Master Modem

PCM Timing Diagram (Short Frame Sync, Master Mode)

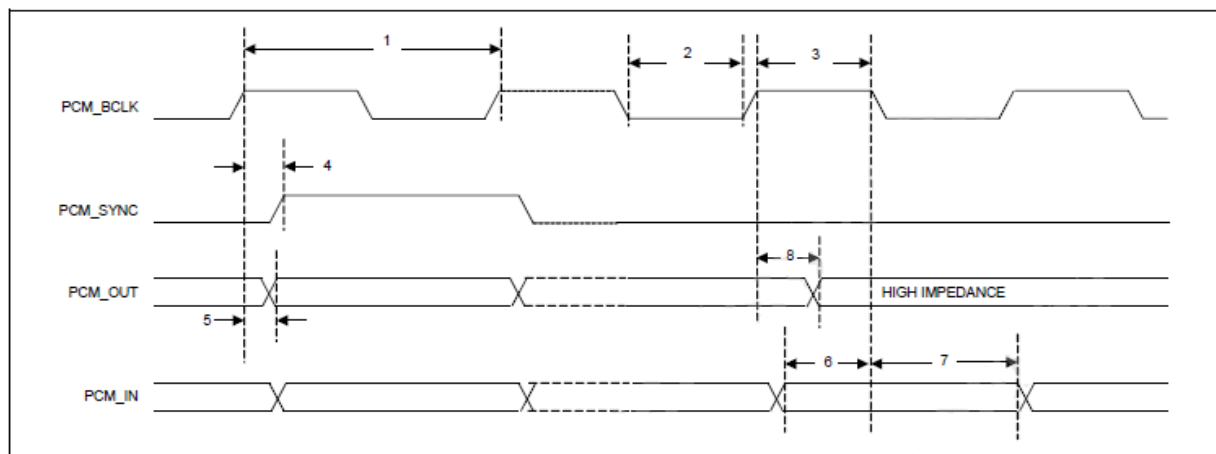


PCM Interface Timing Specifications (Short Frame Sync, Master Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency		–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC delay	0	–	25	ns
5	PCM_OUT delay	0	–	25	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns
8	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

Short Frame Sync, Slave Mode

PCM Timing Diagram (Short Frame Sync, Slave Mode)

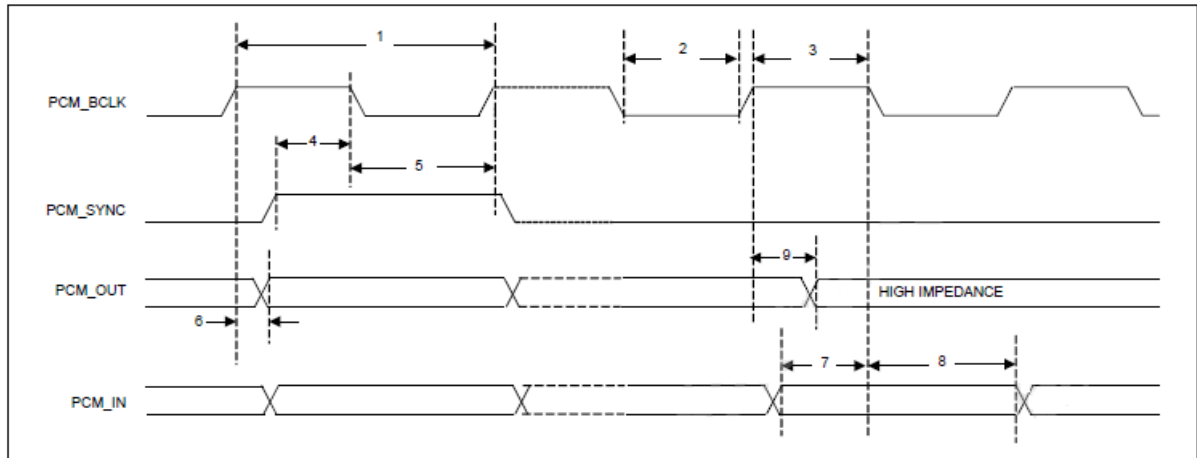


PCM Interface Timing Specifications (Short Frame Sync, Slave Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	—	—	12	MHz
2	PCM bit clock low	41	—	—	ns
3	PCM bit clock high	41	—	—	ns
4	PCM_SYNC setup	8	—	—	ns
5	PCM_SYNC hold	8	—	—	ns
6	PCM_OUT delay	0	—	25	ns
7	PCM_IN setup	8	—	—	ns
8	PCM_IN hold	8	—	—	ns
9	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	—	25	ns

Long Frame Sync, Master Mode

PCM Timing Diagram (Long Frame Sync, Master Mode)

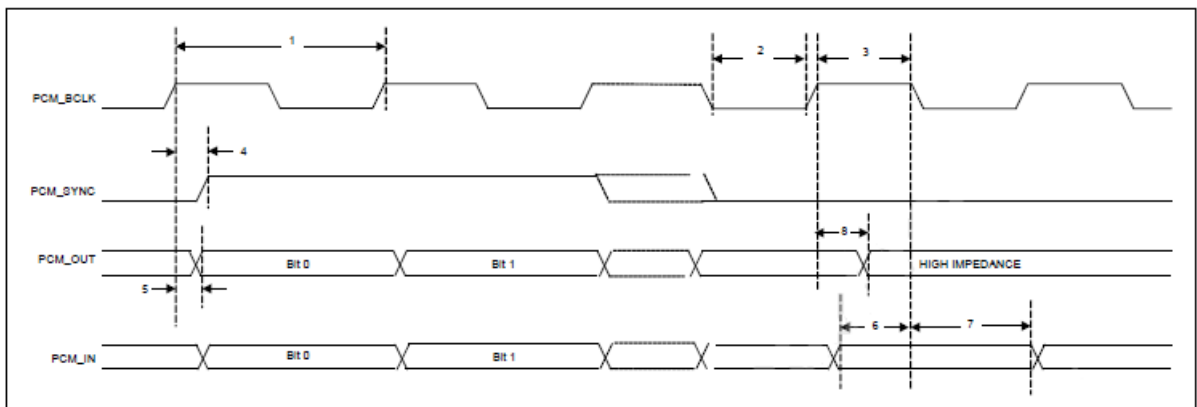


PCM Interface Timing Specifications (Long Frame Sync, Master Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC delay	0	–	25	ns
5	PCM_OUT delay	0	–	25	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns
8	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

Long Frame Sync, Slave Mode

PCM Timing Diagram (Long Frame Sync, Slave Mode)

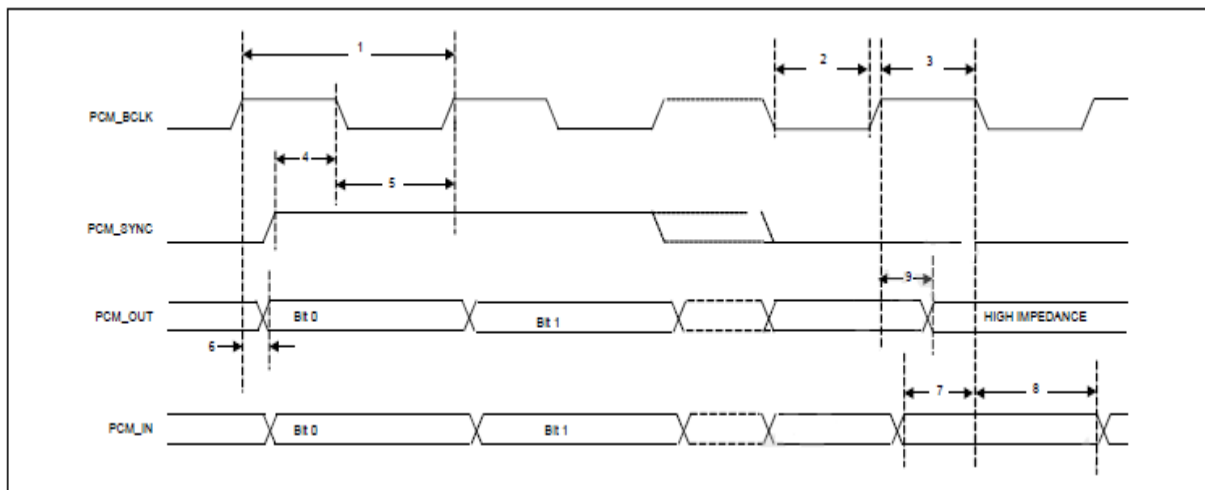


PCM Interface Timing Specifications (Long Frame Sync, Slave Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_OUT delay	0	–	25	ns
7	PCM_IN setup	8	–	–	ns
8	PCM_IN hold	8	–	–	ns
9	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

Short Frame Sync, Burst Mode

PCM Burst Mode Timing (Receive Only, Short Frame Sync)

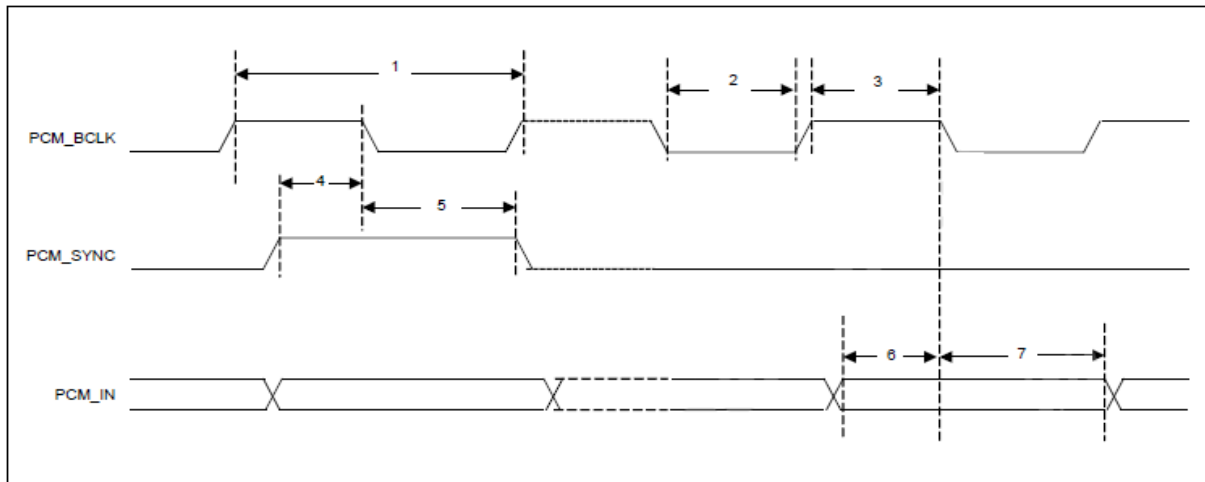


PCM Burst Mode (Receive Only, Short Frame Sync)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	24	MHz
2	PCM bit clock low	20.8	–	–	ns
3	PCM bit clock high	20.8	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns



Long Frame Sync, Burst Mode

PCM Burst Mode Timing (Receive Only, Long Frame Sync)

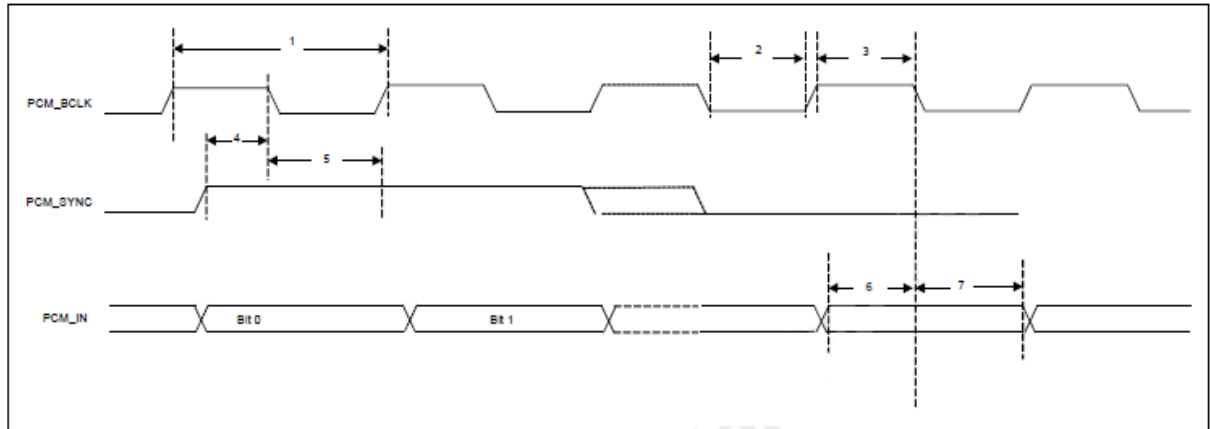

PCM Burst Mode (Receive Only, Long Frame Sync)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	24	MHz
2	PCM bit clock low	20.8	–	–	ns
3	PCM bit clock high	20.8	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns



8.5 UART Timing

The UART is a standard 4-wire interface (RX, TX, RTS, and CTS) with adjustable baud rates from 9600 bps to 4.0 Mbps. The interface features an automatic baud rate detection capability that returns a baud rate selection. Alternatively, the baud rate may be selected through a vendor-specific UART HCI command.

UART has a 1040-byte receive FIFO and a 1040-byte transmit FIFO to support EDR. Access to the FIFOs is conducted through the AHB interface through either DMA or the CPU. The UART supports the Bluetooth 5.2 UART HCI specification: H4, a custom Extended H4, and H5. The default baud rate is 115.2 Kbaud.

The UART supports the 3-wire H5 UART transport, as described in the Bluetooth specification (Three-wire UART Transport Layer). Compared to H4, the H5 UART transport reduces the number of signal lines required by eliminating the CTS and RTS signals.

The AP6203BM UART can perform XON/XOFF flow control and includes hardware support for the Serial Line Input Protocol (SLIP). It can also perform wake-on activity. For example, activity on the RX or CTS inputs can wake the chip from a sleep state.


Normally, the UART baud rate is set by a configuration record downloaded after device reset, or by automatic baud rate detection, and the host does not need to adjust the baud rate. Support for changing the baud rate during normal HCI UART operation is included through a vendor-specific command that allows the host to adjust the contents of the baud rate registers. The AP6203BM UARTs operate correctly with the host UART as long as the combined baud rate error of the two devices is within $\pm 2\%$.



Example of Common Baud Rates

Desired Rate	Actual Rate	Error (%)
4000000	4000000	0.00
3692000	3692308	0.01
3000000	3000000	0.00
2000000	2000000	0.00
1500000	1500000	0.00
1444444	1454544	0.70
921600	923077	0.16
460800	461538	0.16
230400	230796	0.17
115200	115385	0.16
57600	57692	0.16
38400	38400	0.00
28800	28846	0.16
19200	19200	0.00
14400	14423	0.16
9600	9600	0.00


UART Timing

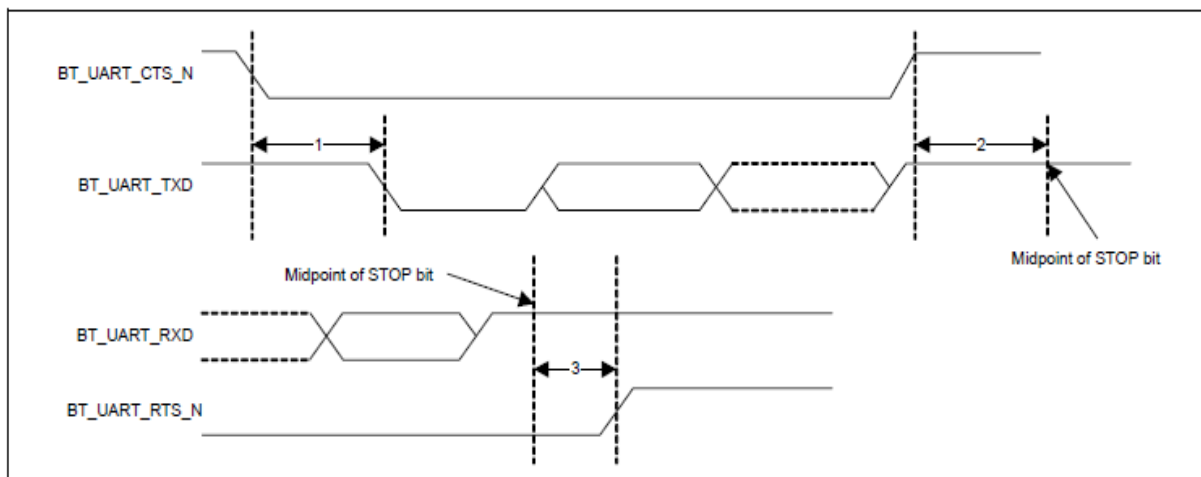

UART Timing Specifications

Ref	Characteristics	Min.	Typ.	Max.	Unit
1	Delay time, BT_UART_CTS_N low to BT_UART_TXD valid	–	–	1.5	Bit periods
2	Setup time, BT_UART_CTS_N high before midpoint of stop bit	–	–	0.5	Bit periods
3	Delay time, midpoint of stop bit to BT_UART_RTS_N high	–	–	0.5	Bit periods

9. Recommended Reflow Profile

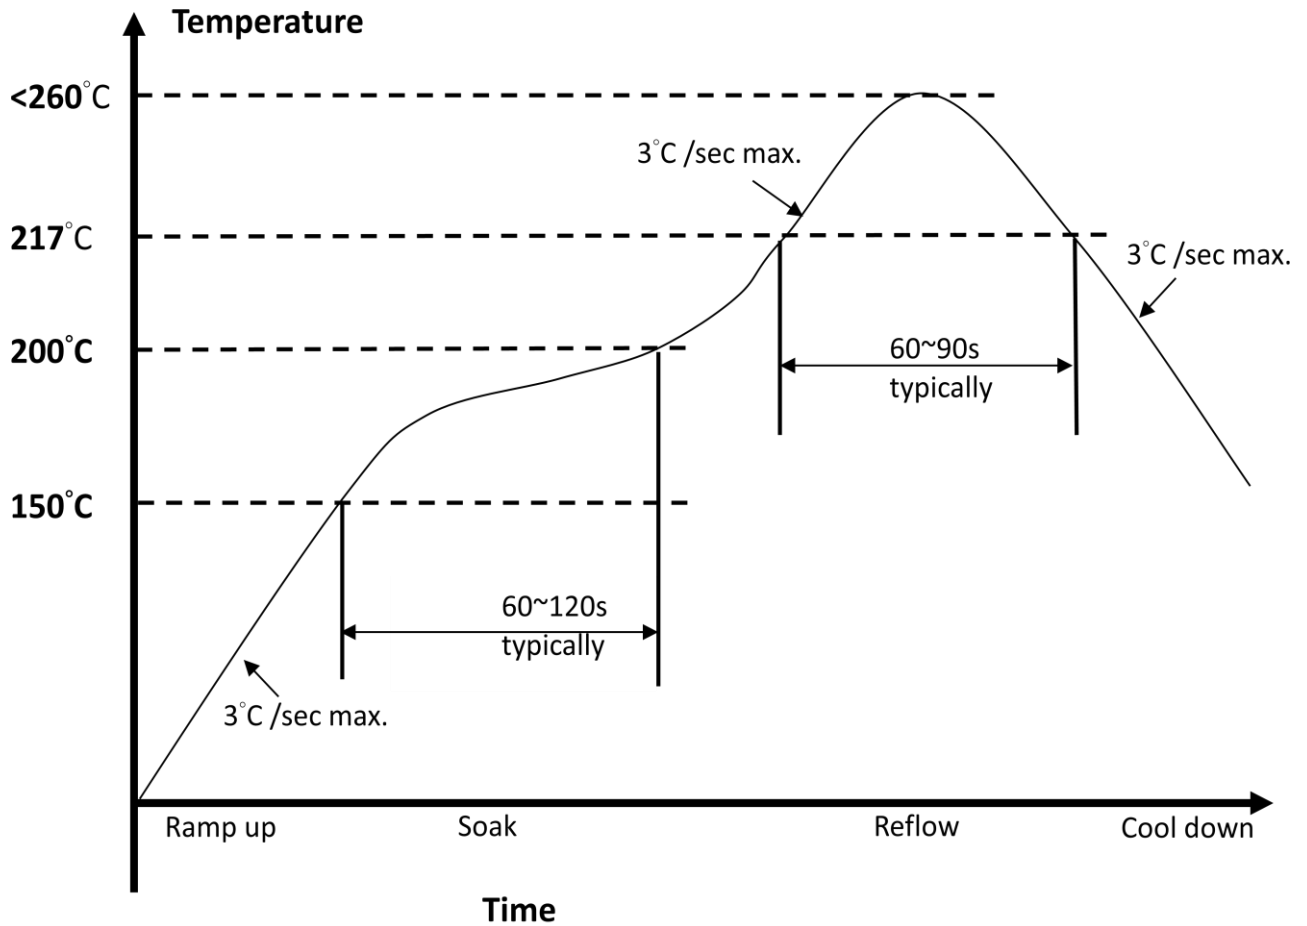

1. Referred to IPC/JEDEC standard
2. Peak Temperature : <260°C
3. Cycle of Reflow : 2 times max.
4. Adding Nitrogen (N₂) to implement 2000ppm or less of oxygen concentration during reflow process is recommended.
5. If the shelf time is exceeded, be sure baking step to remove the moisture from the component

10. Package Information

10.1 Label

Label A → Anti-static and humidity notice



Label B → MSL caution / Storage Condition

	Caution This bag contains MOISTURE-SENSITIVE DEVICES	LEVEL If blank, see adjacent bar code label
1. Calculated shelf life in sealed bag: 12 months at <40°C and <90% relative humidity (RH) 2. Peak package body temperature: _____ °C If blank, see adjacent bar code label 3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be a) Mounted within: _____ hours of factory conditions If blank, see adjacent bar code label ≤30°C/60% RH, or b) Stored per J-STD-033 4. Devices require bake, before mounting, if: a) Humidity Indicator Card reads >10% for level 2a - 5a devices or >60% for level 2 devices when read at 23 ± 5°C b) 3a or 3b are not met 5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure Bag Seal Date: _____ If blank, see adjacent bar code label Note: Level and body temperature defined by IPC/JEDEC J-STD-020		



Label C → Inner box label .

PO:	
AMK DEVICE:	
PKG S/N:	9PKGYMMDDNNNNN
Model Name:	APXXXXXXX (R3HF)
P/N:	99X-XXX-XXXXR
Quantity:	QQQQ
Date Code:	YYWW
Lot Code:	XXXXXXXX

Label D → Carton box label .



AMPAK Technology Inc.	
PO:	
AMK DEVICE:	
Model Name:	APXXXXXXX (R3HF)
Part No.:	99X-XXX-XXXXR
Quantity:	QQQQ
Lot D/C:	XXXXXXXX YYWW QQQQ
Manufacture:	YYYY/MM/DD


10.2 Dimension

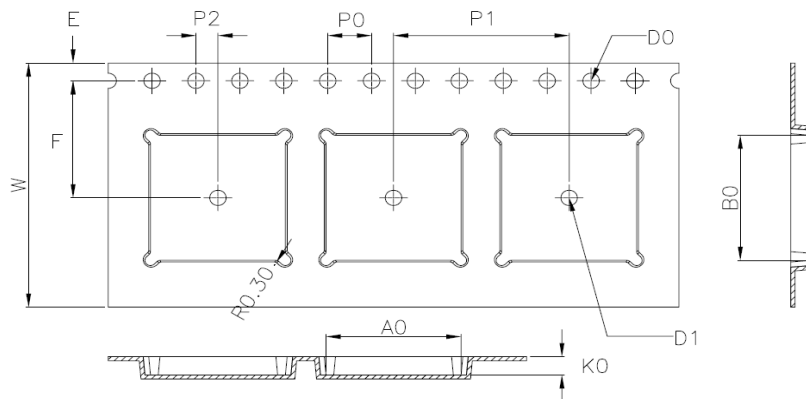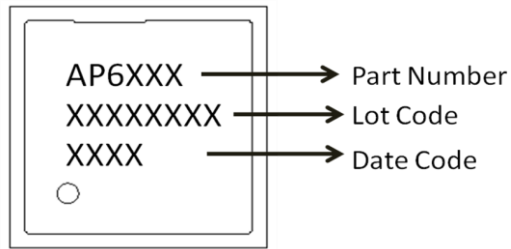

W	24.00±0.30
A0	12.30±0.10
B0	12.30±0.10
K0	1.80±0.10
E	1.75±0.10
F	11.50±0.10
P0	4.00±0.10
P1	16.00±0.10
P2	2.00±0.10
D0	1.50 ^{+0.10} / _{-0.00}
D1	Ø1.50MIN

1. 10 sprocket hole pitch cumulative tolerance ±0.20.
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481-D requirements.
5. Thickness: 0.30±0.05mm.
6. Component load per 13" reel : 1500 pcs

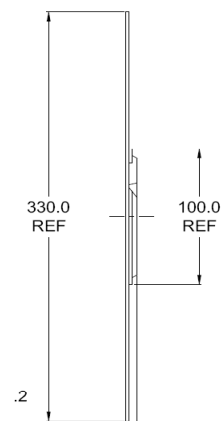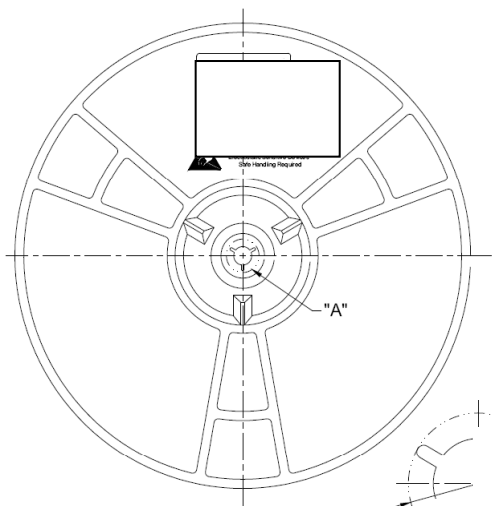

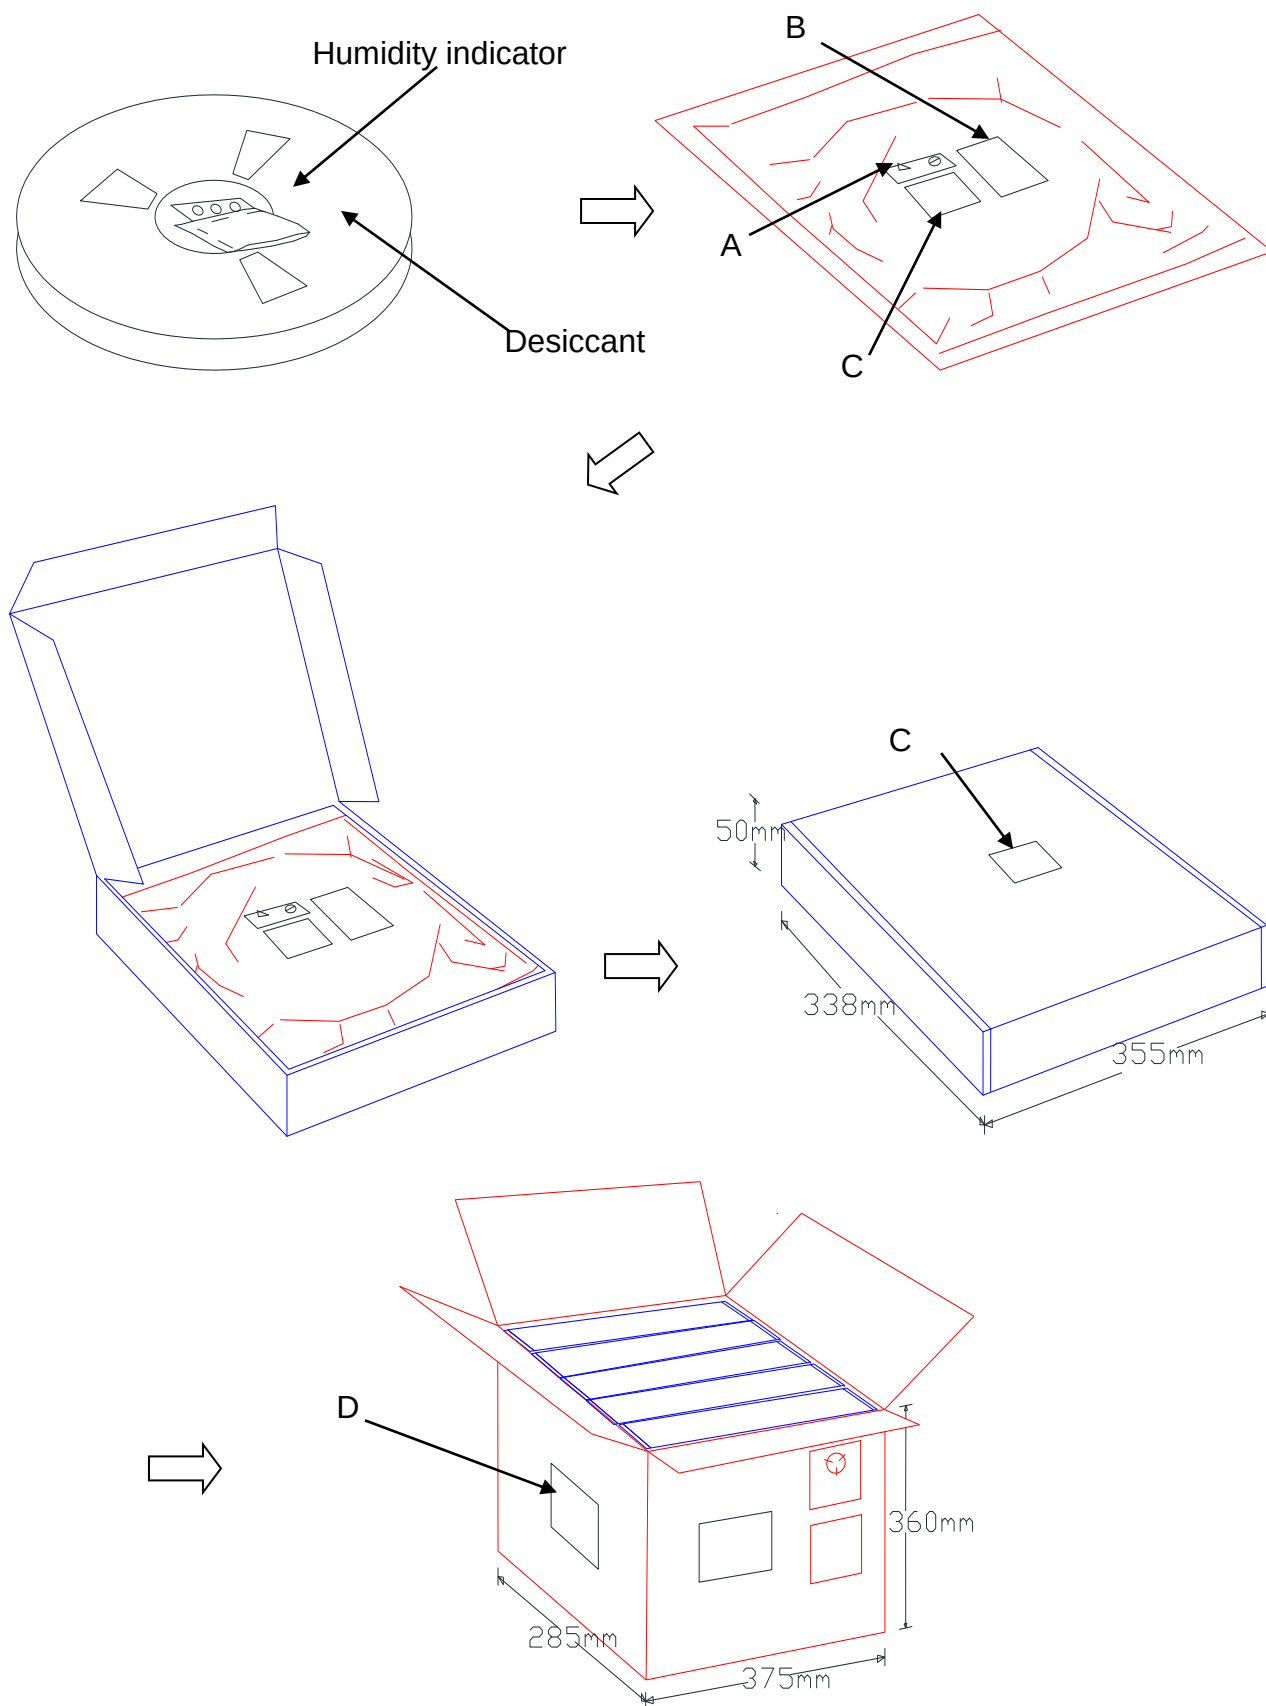

10.3 MSL Level / Storage Condition

	Caution This bag contains MOISTURE-SENSITIVE DEVICES	LEVEL 4 If blank, see adjacent bar code label
		1. Calculated shelf life in sealed bag: 12 months at $<40^{\circ}\text{C}$ and $<90\%$ relative humidity (RH) 2. Peak package body temperature: <u>250</u> $^{\circ}\text{C}$ If blank, see adjacent bar code label 3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be a) Mounted within: <u>72</u> hours of factory conditions If blank, see adjacent bar code label $\leq 30^{\circ}\text{C}/60\% \text{ RH}$, or b) Stored per J-STD-033 4. Devices require bake, before mounting, if: a) Humidity Indicator Card reads $>10\%$ for level 2a-5a devices or $>60\%$ for level 2 devices when read at $23 \pm 5^{\circ}\text{C}$ b) 3a or 3b are not met. 5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure. Bag Seal Date: _____ If blank, see adjacent bar code label Note: Level and body temperature defined by IPC/JEDEC J-STD-020